


NI8-M18-AP6X/S120 电感式传感器 – 带有扩展检测范围




技术数据

型号	NI8-M18-AP6X/S120
货号	4611230
Special version	S120 对应于：最高环境温度 = 120 °C
常用数据	
额定开关距离	8 mm
安装条件	非齐平
安全工作距离	$\leq (0.81 \times S_n) \text{ mm}$
修正系数	37#钢 = 1; 铝 = 0.3; 不锈钢 = 0.7; 黄铜 = 0.4
重复精度	$\leq 2 \%$ 满量程
温度漂移	$\leq \pm 10 \%$
	$\leq \pm 20 \%, \geq +70 \text{ °C}$
磁滞	3...15 %
电气数据	
工作电压 U_B	10...30 VDC
纹波电压 U_{ss}	$\leq 10 \% U_{Bmax}$
额定直流工作电流 I_o	$\leq 200 \text{ mA}$
空载电流	$\leq 15 \text{ mA}$
漏电流	$\leq 0.1 \text{ mA}$
隔离测试电压	0.5 kV
短路保护	是/循环
I_o 时的压降	$\leq 1.8 \text{ V}$
断线/反极性保护	是/是
输出性能	3线, 常开触点, PNP
开关频率	0.1 kHz
机械数据	
设计	螺纹, M18 x 1

特点


- M18 x 1 圆柱螺纹
- 铜镀铬
- 耐高温到120°C
- 3线直流, 10...30 VDC
- 常开触点, PNP输出
- 线缆连接

接线图



功能原理

电感式传感器以无磨损和非接触的方式来检测金属物体。基于此目的它通过高频交流电磁场来检测被测物。对电感式传感器而言，磁场由绕在铁芯体芯线圈上的LC振荡电路产生。特殊型电感式传感器能被用于-60°C到+250°C。

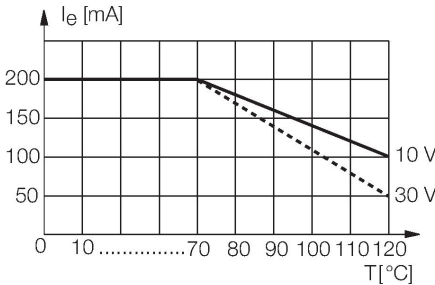


技术数据

尺寸	97 mm
外壳材料	金属, CuZn, 镀铬
感应面材料	塑料, PA12-GF30
底帽	塑料, EPTR
外壳螺母的最大拧紧扭矩	25 Nm
电气连接	线缆
线缆材质	Ø 5.2 mm, SiHSi, 硅有机树脂, 2 m
导体横截面	3 x 0.5 mm ²
环境条件	
工作温度	-25...+120 °C
防震动性	55 Hz (1 mm)
防冲击性	30 g (11 ms)
防护等级	IP67
开关状态指示	LED指示灯, 黄色



安装说明

安装说明/描述

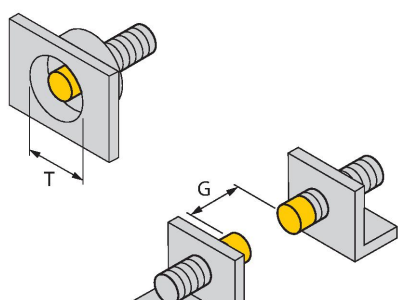The image contains three technical diagrams illustrating the installation of a sensor. The top diagram is a side view of a square mounting plate with a central circular hole. A yellow cylindrical sensor is inserted into this hole. A dimension line labeled 'T' indicates the distance from the bottom edge of the plate to the center of the sensor. The middle diagram is a top-down view of the same assembly. It shows the square plate and the yellow sensor. A dimension line labeled 'G' indicates the distance from the center of the sensor to the center of a hole in the plate. The bottom diagram is a perspective view showing two mounting plates. One plate has the yellow sensor inserted. A dimension line labeled 'N' indicates the distance between the centers of the two plates. A dimension line labeled 'S' indicates the distance from the center of the sensor to the edge of the plate. A dimension line labeled 'D' indicates the distance from the center of the sensor to the center of the hole in the plate. A dimension line labeled 'W' indicates the distance from the center of the sensor to the edge of the plate.

距离D	3 x B
距离W	3 x Sn
距离T	3 x B
距离S	1.5 x B
距离G	6 x Sn
距离N	2 x Sn
B有效面积直径	Ø 18 mm

附件

QM-18	6945102	MW18	6945004
	快速安装支架单端封闭；材料：铜镀铬外螺纹M24 × 1.5。注意: 使用快速安装支架时，接近开关的开关距离可能更改。		用于圆柱螺纹传感器的安装托架；材料：不锈钢 A2 1.4301 (AISI 304)