


QS18VP6LLPQ8 Photoelectric Sensor – Retroreflective Laser Sensor with Polarizing Filter



Technical data


Туре	QS18VP6LLPQ8	
ID	3073246	
Optical data		
Function	Retroreflective Sensor	
Operating mode	Polarized	
Reflector included in delivery	yes	
Light type	Red polarized	
Wavelength	650 nm	
Laser class	<u>A</u> 1	
Beam diameter	4 at 10000 mm	
Range	10010000 mm	
Electrical data		
Operating voltage	1030 VDC	
Residual ripple	< 10 % U _{ss}	
DC rated operational current	≤ 100 mA	
Short-circuit protection	yes	
Reverse polarity protection	yes	
Output function	NO/NC, PNP	
Current output	100 mA	
Switching frequency	≤ 700 Hz	
Readiness delay	≤ 200 ms	
Response time typical	< 0.7 ms	
Setting option	Potentiometer	
Mechanical data		
Design	Rectangular with thread, QS18	
Dimensions	Ø 18 x 31 x 15 x 35 mm	

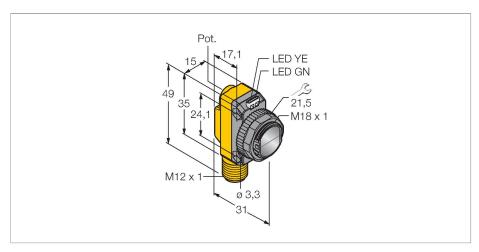


Features

- Male M12 × 1, 4-pin
- ■Protection class IP67
- ■LED, all-round visible
- Sensitivity adjusted via potentiometer
- Microprism reflector BRT-51X51BM recommended for ranges up to 10 m and self-adhesive reflector film BRT-TVHG-2X2 for ranges up to 1.5 m; included in scope of delivery
- Operating voltage: 10...30 VDC
- ■PNP switching output, changeover

Wiring diagram





Functional principle


Retro-reflective sensors incorporate emitter and receiver in the same compact housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. An object is detected when it interrupts this beam. Retro-reflective sensors incorporate some of the advantages of opposed mode sensors (good contrast and high excess gain). Further it is merely

Technical data


Housing material	Plastic, ABS		
Lens	plastic, Acrylic		
Electrical connection	Connector, M12 × 1, PVC		
Number of cores	4		
Ambient temperature	-10+50 °C		
Protection class	IP67		
Special features	Laser		
Power-on indication	LED, Green		
Switching state	LED, Yellow		
Error indication	LED, green, Flashing		
Excess gain indication	LED, yellow, flashing		
Tests/approvals			
Approvals	CE, cURus		

required to install and wire a single device. A smaller sensing range and susceptibility of devices without polarisation filter can be of disadvantage when shiny objects have to be detected.

Excess gain curve Excess gain in relation to the distance (reflector type BRT-51X51BM)




Accessories



3033200

Mounting bracket, rectangular, stainless steel, for sensors with 18 mm thread



3012558

Mounting bracket, material VA 1.4401, for M10 \times 1.5 thread, thread length 18 mm




41

21

M18 x 1



Mounting bracket, stainless steel, for 18 mm thread



3052519

Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

Accessories

24,9

Dimension drawing	Туре	ID
	RKC4.4T-2/TEL	6625013




Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com



Accessories

Dimension drawing	Туре	ID	
> 6.2	BRT-51X51BM	3071791	Rectangular reflector, reflection coefficient 2.0, material acrylic, ambient temperature -20 +60 °C, microprism geometry



BRT-TVHG2X2 3057260 Rectangular reflective foil, reflection coefficient 0.8, ambient temperature -20 ... +60 °C, 4 sheets

