


# Q20EQ Photoelectric Sensor – Opposed Mode Sensor (Emitter)



## Technical data


| Type                        | Q20EQ                                     |  |
|-----------------------------|---|--|
| ID                          | 3078225                                   |  |
| Optical data                |   |  |
| Function                    | Opposed mode sensor                       |  |
| Operating mode              | Emitter                                   |  |
| Light type                  | Red                                       |  |
| Wavelength                  | 655 nm                                    |  |
| Range                       | 012000 mm                                 |  |
| Electrical data             |   |  |
| Operating voltage           | 1030 VDC                                  |  |
| Residual ripple             | < 10 % U <sub>ss</sub>                    |  |
| No-load current             | ≤ 18 mA                                   |  |
| Reverse polarity protection | yes                                       |  |
| Readiness delay             | ≤ 100 ms                                  |  |
| Mechanical data             |   |  |
| Design                      | Rectangular, Q20                          |  |
| Dimensions                  | 20 x 12 x 32 mm                           |  |
| Housing material            | Plastic, Thermoplastic material           |  |
| Lens                        | plastic, Acrylic                          |  |
| Electrical connection       | Cable with connector, M8 × 1, 0.15 m, PVC |  |
| Number of cores             | 4   |  |
| Ambient temperature         | -20+60 °C                                 |  |
| Protection class            | IP67                                      |  |
| Power-on indication         | LED, Green                                |  |
| Excess gain indication      | LED                                       |  |

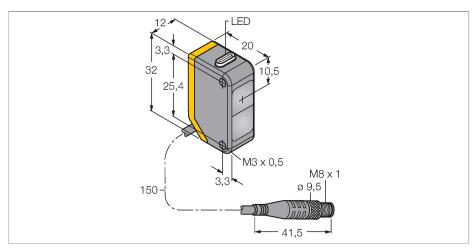

## **Features**

- Cable with male end, PVC, M8 × 1, 4-pin, 150 mm
- ■Protection class IP67
- ■LED all-round visible
- Operating voltage: 10...30 VDC

## Wiring diagram




## Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremly high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions.


# Technical data


# Tests/approvals Approvals CE

## **Excess Gain Curve**




# Accessories





3079040 Mounting bracket, stainless steel, rectangular, for Q20



Mounting bracket, stainless steel, rectangular, for Q20

3079042



Protective housing, stainless steel, for Q20

3079043

## Accessories

| Dimension drawing | Туре        | ID      |  |
|-------------------|-------------|---------|--|
| M8 x 1            | PKW4M-2/TEL | 6625067 | Connection cable, female M8, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com   |
| M8 x 1 o 9.6      | PKG4M-2/TEL | 6625061 | Connection cable, female M8, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com |