


K80LGRY2PQ


LED Signal Light

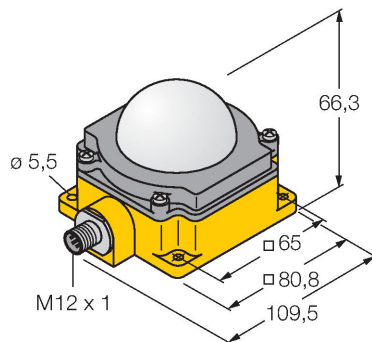

Features

- Multicolor: Green (COL 1) / Red (COL 2) / Yellow (COL 3)
- Operating voltage 18...30 VDC
- Protection class IP67
- Flashing or alternating
- Flashing function adjustable via terminal programming

Wiring diagram

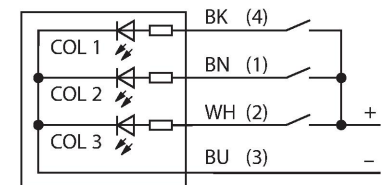

Technical data


Type	K80LGRY2PQ
ID	3076847
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green Red Yellow
Dimmable	No
Features of color 1	Green, Miscellaneous
Features of color 2	Red
Features of color 3	Yellow
Electrical data	
Operating voltage U_B	18...30 VDC
Max. current consumption per color	40 mA
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Dome, K80L
Dimensions	107.6 x 80.9 x 66.7 mm
Housing material	Plastic, PC, Yellow
Window material	Acrylic, diffuse
Electrical connection	Connector, M12 x 1, PVC
Number of cores	5
Ambient temperature	-40...+50 °C
Protection class	IP67

Technical data

Tests/approvals	
Approvals	CE


Accessories

SMBDX80DIN	3077161
------------	---------



Mounting panel for DIN rail, suited for CP80, DX80, K80, Q80, operating temperature: -20...90 °C

Accessories

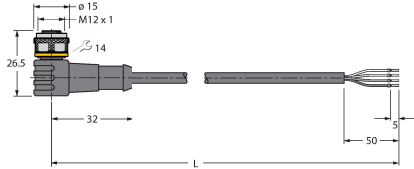Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.4T-2/TEL	6625025	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval