


Q20PLVQ5

Photoelectric Sensor – Retroreflective Sensor

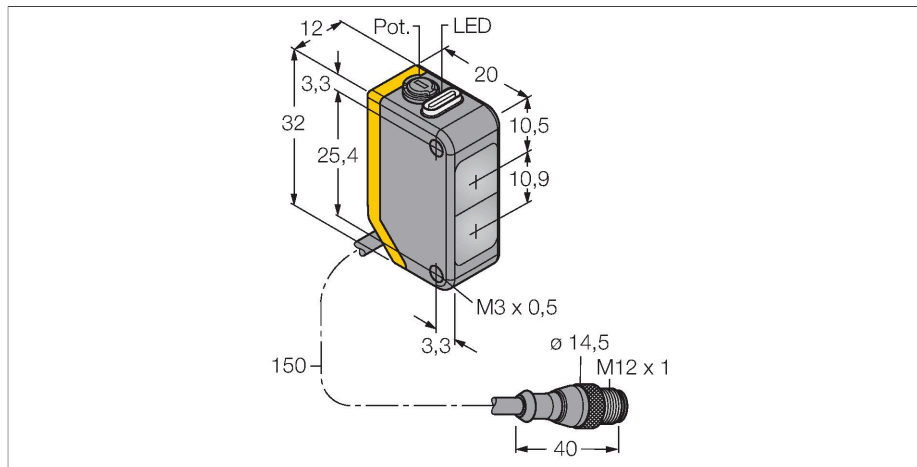


Technical data

Type	Q20PLVQ5
ID	3078195
Optical data	
Function	Retroreflective Sensor
Operating mode	Unpolarized
Reflector included in delivery	no
Light type	Red
Wavelength	645 nm
Range	30...6000 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 100 mA
No-load current	≤ 18 mA
Reverse polarity protection	yes
Output function	Complementary contact, PNP
Switching frequency	≤ 600 Hz
Readiness delay	≤ 100 ms
Response time typical	< 0.8 ms
Setting option	Potentiometer
Mechanical data	
Design	Rectangular, Q20
Dimensions	20 x 12 x 32 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC

Features

- Cable with male end, M12 × 1, 4-pin, PVC, 150 mm
- Protection class IP67
- LED all-round visible
- Sensitivity adjusted via potentiometer
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram



Functional principle


Retroreflective sensors have emitter and receiver circuitry incorporated in the same housing. The light beam of the emitter is directed towards a reflector which returns the light back to the receiver. A target is detected when it interrupts this beam. Retroreflective sensors feature some of the advantages of opposed mode sensors (good contrast and high excess gain). Furthermore, only one device has to be installed and wired. A smaller sensing range and susceptibility of devices without polarizing filter can be of disadvantage when shiny targets have to be detected.

Excess gain curve
Excess gain in relation to distance

Technical data


Number of cores	4
Ambient temperature	-20...+60 °C
Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED, yellow, flashing
Tests/approvals	
Approvals	CE

Excess Gain Curve

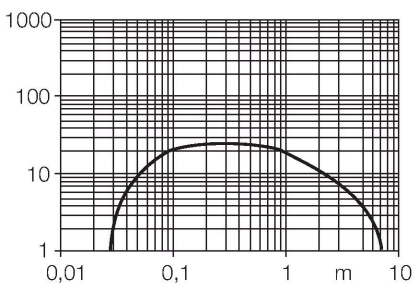


Accessories

SMBQ20H 3079041




Mounting bracket, stainless steel, horizontally mounted, for Q20

SMBQ20L 3079040




Mounting bracket, stainless steel, rectangular, for Q20

SMBQ20LV 3079042



Mounting bracket, stainless steel, rectangular, for Q20

SMBQ20U 3079043



Protective housing, stainless steel, for Q20

Accessories

Dimension drawing	Type	ID	
Technical drawing of the RKC4.4T-2/TEL connection cable. It shows a female M12 connector with a 4-pin configuration. Dimensions include a connector width of 11.5 mm, a cable length of 42 mm, and a total length of L. The cable has a sheath diameter of 14 mm and a core diameter of 1.5 mm.	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
Technical drawing of the WKC4.4T-2/TEL connection cable. It shows a female M12 connector with a 4-pin configuration. Dimensions include a connector width of 26.5 mm, a cable length of 32 mm, and a total length of L. The cable has a sheath diameter of 14 mm and a core diameter of 1.5 mm.	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

Accessories

Dimension drawing	Type	ID	
	BRT-84	3058979	Round reflector, reflection coefficient 1.4, material acrylic, ambient temperature -20 ... +60 °C

