


K90TFDLBGYPQ
LED Signal Light – Flat Beacon



Technical data


Type	K90TFDLBGYPQ
ID	3096192
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Blue Green Yellow Red
LED service life (L70)	50000 h
Dimmable	No
Features of color 1	Blue, Permanently on, 55 lm
Features of color 2	Green, 175 lm
Features of color 3	Yellow, 43 lm
Features of color 4	Red, 83 lm
Electrical data	
Operating voltage U _B	12...30 VDC
Max. current consumption per color	475 mA
Input power	5.7 W
Input type	PNP
Response time typical	< 150 ms
Mechanical data	
Cascadable	No
Design	Puck, K90FDL
Dimensions	Ø 90 x 42 mm
Housing material	Plastic, PC
Window material	Polycarbonate, clear
Electrical connection	Connector, M12 × 1, PVC

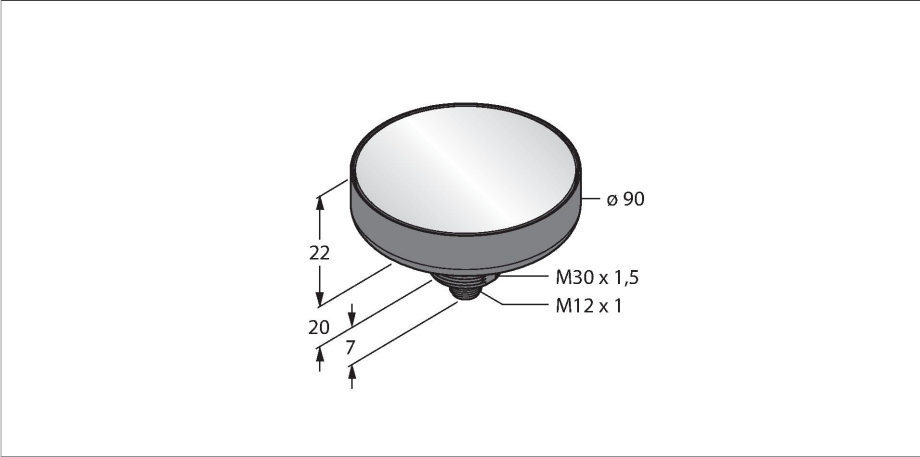

Features

- Daylight bright LED indication
- Protection class IP67
- Mechanical screw-in thread M30 x 1.5
- M12 x 1 male, 8-pin
- Colors: Blue (COL 1), Green (COL 2), Yellow (COL 3), Red (COL 4)
- Alternates between colors when multiple inputs are active
- Operating voltage: 12...30 VDC
- Individually controllable
- Inputs: PNP

Wiring diagram

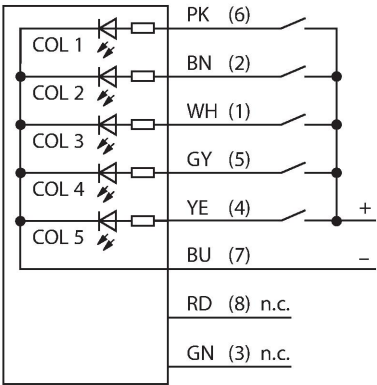



Functional principle

The LED display is suitable for industrial use thanks to its rugged design in protection class IP67. The LED display is on during the input signal period. Only one color is lit up at any time. The simultaneous control of several colors provides for a cyclical change of colors.

Technical data

Number of cores	5
Ambient temperature	-40...+50 °C
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

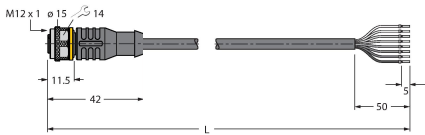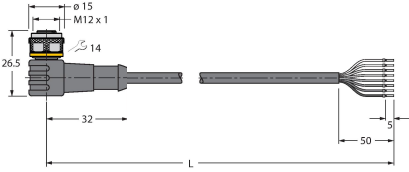Dimension drawing	Type	ID	
	RKC8T-2/TEL	6625130	Connection cable, M12 female connector, straight, 8-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC8T-2/TEL	6625133	Connection cable, M12 female connector, angled, 8-pin, cable length: 2 m, jacket material: PVC, black; cULus approval