


DBS8141-0 Field-Wireable Connector Male Connector M12 × 1, Straight





Туре	DBS8141-0
ID	6930073
Connector A	Male, M12 × 1, Straight, A-coded
Number of pins	4
Contacts	CuZn, Optalloy Coating
Contact carriers	Plastic, PA, Black
Connector body	Plastic, PA, Black
Coupling nut/screw	Plastic, PA, Black
Core cross-section/Clamping ability	0.140.75 mm²
Connection mode	Screw/clamp connection
Mechanical lifespan	> 50 Mating cycles
Protection class	IP67, (screwed together)
Electrical properties at +20 °C	
Rated voltage	250 V
Current	4 A
Insulation resistance	≥≥ 10 ⁸ Ω
forward resistance	≤ 8 mΩ
Mechanical and chemical properties	
Ambient temperature (fixed)	-25+85 °C
Approvals	cULus recognized

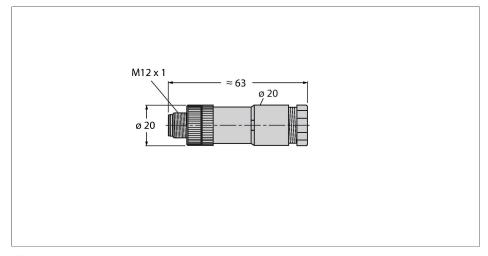

Features









■ Duo cable-connector

■ Plastic coupling nut

Protection class IP67
Screw-clamp terminal

■A-coding

■4-pin

■ Cable feedthrough: 2 cables Ø 2.1-3.0 mm or Ø 4.0-5.0 mm

Contact assignment

