




2-Way Splitter

PROFIBUS T-splitter, Fully Shielded, 12 Mbps

RKSW-2RSSW45-0002

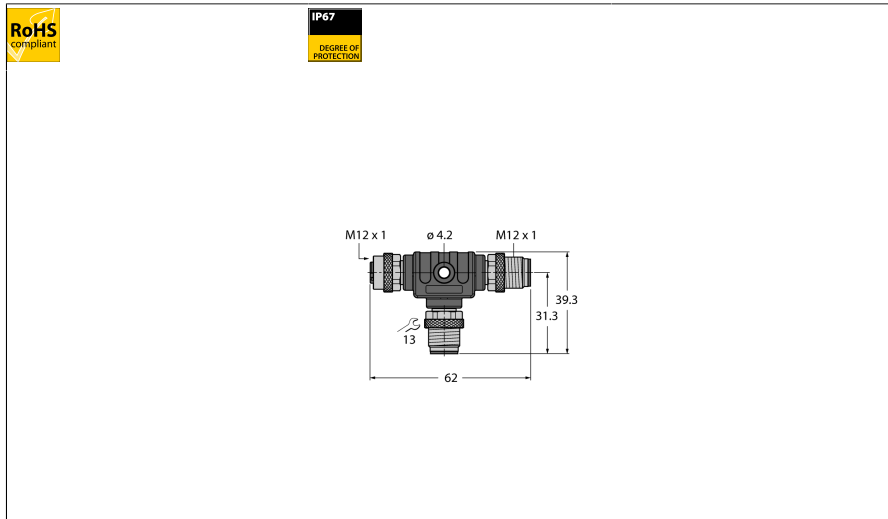

- T piece, reverse-keyed
- For use in PROFIBUS-DP applications
- Direct coupling of several T-splitters is possible
- Female - male - male, 5-pin
- RoHS-compliant
- Protection class IP67



Type	RKSW-2RSSW45-0002
ID	6935098

Distributed I/O	T-splitter
Housing	Plastic, TPU, Black

Connector A	Male Connector, Male - Female, M12 × 1, A-coded
Number of pins	5
Contact carriers	Plastic, TPU, Purple
Coupling nut/screw	Brass, CuZn, Nickel-plated
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP67, Only in screwed condition


Connector B	Female, M12 × 1, A-coded
Number of Pins	4
Contact carriers	Plastic, TPU, Black
Coupling nut/retaining screw	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class	IP67

Network protocol	PROFIBUS-DP
------------------	-------------

Electrical properties at +20 °C	
Rated voltage	48V
Current	0.4AA
Insulation resistance	≥ 10 ⁹ Ω
forward resistance	≤ 5 mΩ

Ambient temperature (fixed)	-30...+90°C
-----------------------------	-------------

Circuit Diagram



Accessories

Type code	Ident no.		Dimension drawing
TORQUE-WRENCH-SET-BUS	6936171	Torque wrench set; grip with adjustable torque 0.4 to 1.0 Nm; torque wrench set, fork wrench for M8 (SW9), fork wrench for M12 (SW13), fork wrench for M12 (SW14)	